
Problem I: Pixel Shuffle

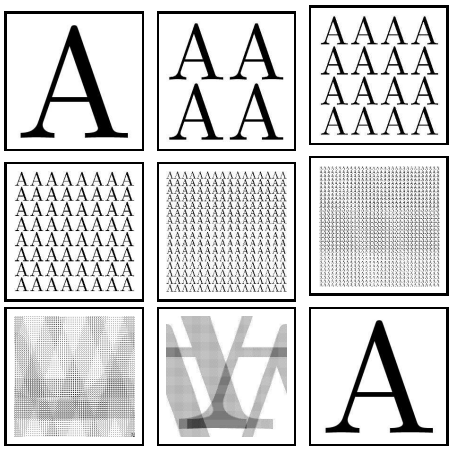

Shuffling the pixels in a bitmap image sometimes yields random looking images. However, by repeating the shuffling enough times, one finally recovers the original images. This should be no surprise, since "shuffling" means applying a one-to-one mapping (or permutation) over the cells of the image, which come in finite number.

Problem

Your program should read a number n, and a series of elementary transformations that define a "shuffling" ϕ of $n \times n$ images. Then, your program should compute the minimal number m ($m > 0$), such that m applications of ϕ always yield the original $n \times n$ image.

For instance if ϕ is counter-clockwise 90° rotation then $m = 4$.



Input specification

Input is made of two lines, the first line is number n ($2 \leq n \leq 2^{10}$, n even). The number n is the size of images, one image is represented internally by a $n \times n$ pixel matrix (a_i^j), where i is the row number and j is the column number. The pixel at the upper left corner is at row 0 and column 0.

The second line is a non-empty list of at most 32 words, separated by spaces. Valid words are the keywords **id**, **rot**, **sym**, **bhsym**, **bvsym**, **div** and **mix**, or a keyword followed by "**-**". Each keyword **key** designates an elementary transform (as defined by Figure 1), and **key-** designates the inverse of transform **key**. For instance, **rot-** is the inverse of counter-clockwise 90° rotation, that is clockwise 90° rotation. Finally, the list k_1, k_2, …, k_p designates the compound transform $\phi = k_1 \circ k_2 \circ \cdots \circ k_p$. For instance, "**bvsym rot-**" is the transform that first performs clockwise 90° rotation and then vertical symmetry on the lower half of the image.





Figure 1: Transformations of image (a_i^j) into image (b_i^j)

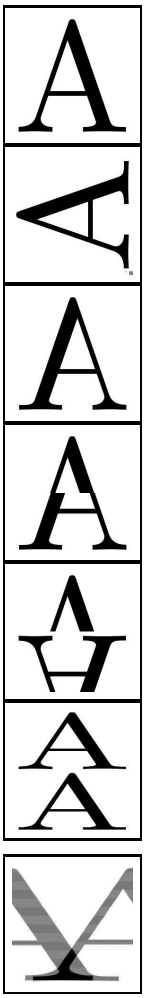

id, identity. Nothing changes : $b_i^j = a_i^j$.

rot, counter-clockwise 90° rotation

sym, horizontal symmetry : $b_i^j = a_i^{n-1-j}$

bhsym, horizontal symmetry applied to the lower half of image : when $i \geq n/2$, then $b_i^j = a_i^{n-1-j}$. Otherwise $b_i^j = a_i^j$.

bvsym, vertical symmetry applied to the lower half of image ($i \geq n/2$)

div, division. Rows 0, 2, ..., $n-2$ become rows 0, 1, ... $n/2-1$, while rows 1, 3, ... $n-1$ become rows $n/2$, $n/2+1$, ... $n-1$.

mix, row mix. Rows $2k$ and $2k+1$ are interleaved. The pixels of row $2k$ in the new image are $a_{2k}^0, a_{2k+1}^0, a_{2k}^1, a_{2k+1}^1, \ldots a_{2k}^{n/2-1}, a_{2k+1}^{n/2-1}$, while the pixels of row $2k+1$ in the new image are $a_{2k}^{n/2}, a_{2k+1}^{n/2}, a_{2k}^{n/2+1}, a_{2k+1}^{n/2+1}, \ldots a_{2k}^{n-1}, a_{2k+1}^{n-1}$

Output specification

Your program should output a single line whose contents is the minimal number m ($m > 0$) such that ϕ^m is the identity. You may assume that, for all test input, you have $m < 2^{31}$.

Examples

If the input is:

```
256
rot- div rot div
```

Then, correct output is :

```
8
```

If the input is:

```
256
bvsym div mix
```

Then, correct output is:

```
63457
```